



CJC™ Fine Filter unit 15/25

removes particles, water, oil degradation products and acids from oil

Product Sheet

APPLICATION

The **CJC™ Fine Filter unit 15/25** is an offline filter which simultaneously removes with high efficiency particles, water, oil degradation products and / or acid compounds from oils. The filter is used for applications in the industry, energy, mining, marine and offshore sector as well as in wind turbines.

Typical applications e.g.:


- Hydraulic oil (*mobile machines, injection moulding machines etc.*)
- Lubrication oil (*bearings, gear boxes, engines, compressors etc.*)
- HFD fluids / phosphate ester and other high inflammable fluids (*control systems etc.*)
- HFC fluids / water glycol and other aqueous fluids (*die casting machines etc.*)
- Machining oils (*machine tools etc.*)
- Insulating and tap changer oils (*transformers*)

ADVANTAGES

- simultaneous removal of particles, water and oil degradation products as well as neutralisation of acids
- constant high oil cleanliness
- no oil related, expensive machine failures
- longer lifetime of oil and components
- longer service life time of the expensive inline filters
- high filter efficiency by continuous fine and depth filtration, independent from the operation of the machine
- optimum filtration capacity by specifically adjusted pump flow

OFFLINE PRINCIPLE

The offline filtration enables due to the independent circuit an optimum adjustment of pump flow to operating fluid and a fine filtration to a range of 3 µm absolute respectively 1 µm nominal. The CJC™ Fine Filter unit draws the oil from the lowest point of the system tank. Slowly and at a constant flow rate the oil passes the CJC™ depth filter insert radially from the outside to the inside ensuring a long contact of the fluid with the filter media and thereby an enormously high filter efficiency. The oil is returned to the tank close to the suction point of the main system pump. Clean oil is able to loosen already deposited oil degradation products from the surfaces of the components or the tank and to hold them in suspension until finally the whole oil system is cleaned.

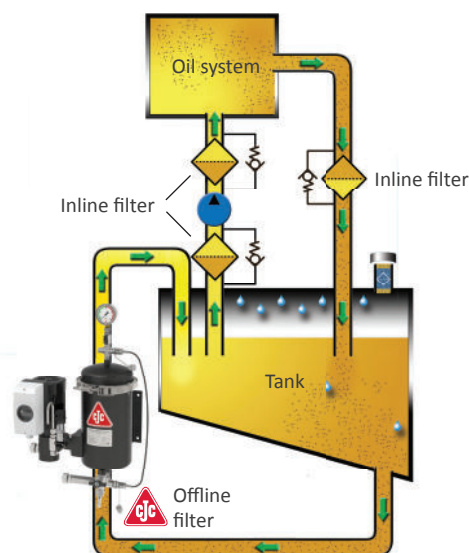

CJC™ Fine Filter unit 15/25

TECHNICAL DATA

CJC™ Fine Filter unit		15/25
Oil volume, max.	L	1,500
Oil temperature, max. *)	°C	130
Material filter dome / base		Steel
Pump flow	L/h	application-oriented, max. 360
Power consumption, approx.	kW	0.12 - 0.18
Motor voltage		AC / DC
Pressure drop, max.	bar	2
Dry weight, approx.	kg	18
Operating weight, approx.	kg	23
Filter inserts	pc.	1
Filter capacity - CJC™ Fine Filter insert made of cellulose (see product sheets)		
Dirt holding capacity, approx.	kg	1.1
Water holding capacity **)	ml	400 - 600
Filter capacity - CJC™ Filter insert type MS (see product sheets)		
Water holding capacity, max.	ml	600
Filter capacity - CJC™ Filter insert type AM, AO, BE (see product sheets)		
Neutralisation capacity (approx. values) with 1,000 L fluid **)		0.026 - 0.068
Equipment		
Standard: • Sampling point for oil analyses • Pressure switch for monitoring the degree of saturation of filter inserts • Continuous air-vent for permanent optimized efficiency of the filter processes • Motor protection switch with integrated ON / OFF switch • Non-return valve to avoid a return flow		
Optional: • Elektrical control		

*) Designs for other fluid conditions available on request.

**) Depends on filter insert type.

CJC™ Fine Filter unit 15/25

removes particles, water, oil degradation products and acids from oil


Product Sheet

COMPONENTS	
Item	Part
1	Filter cover
2	Filter housing
8	Continuous air vent
9	Pressure gauge
11 / 12	Pump with motor
13	Non-return valve
14	Drain valve DN 16
15	Pressure switch
24	Motor protection switch
25	Sampling point
A	Suction connection G 1/2"
B	Filter outlet G 1/2"

DIMENSIONS

Details see drawing no. ZUB15-059-2
Subject to technical changes.

Free height: 65

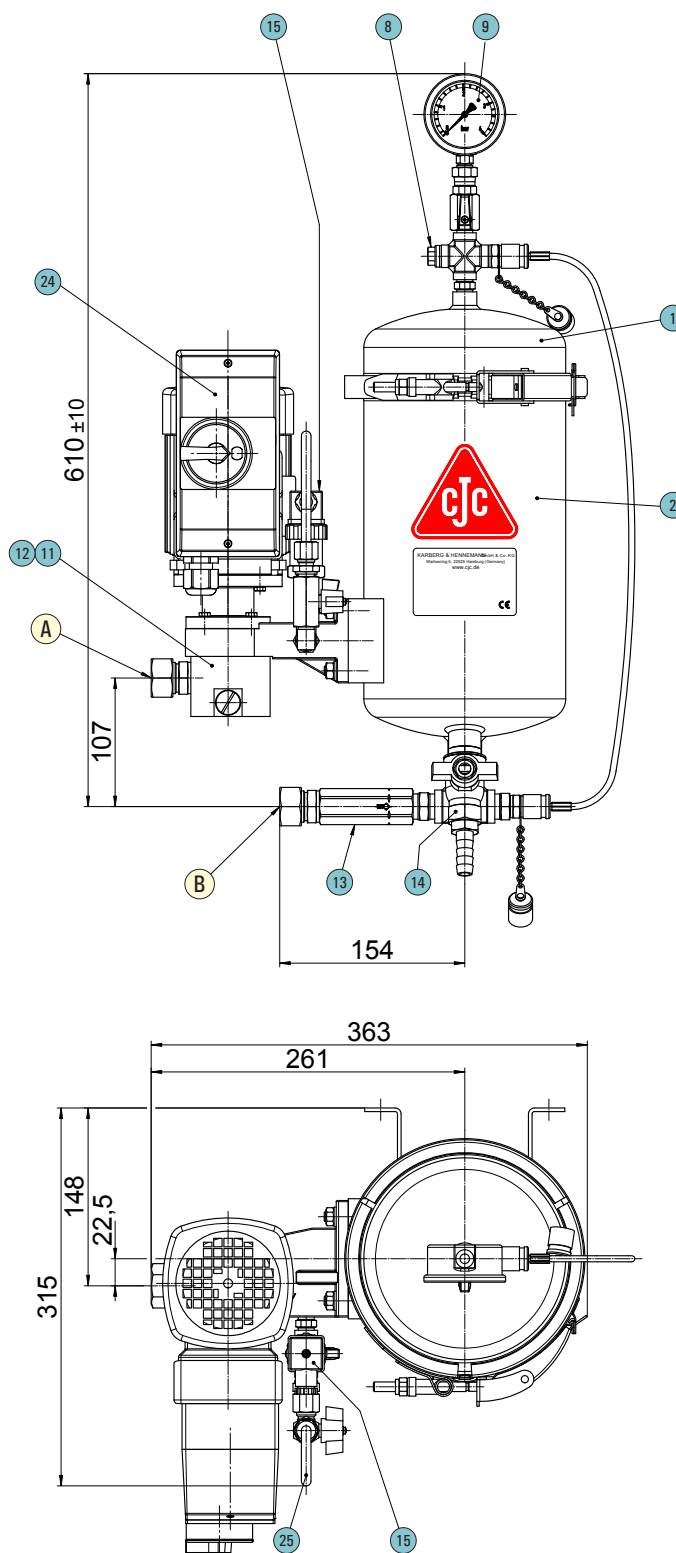

Dimensions in mm