



CJC™ Fine Filter unit 427/108

removes particles, water, oil degradation products and acids from oil

Product Sheet

APPLICATION

The CJC™ Fine Filter unit 427/108 is an offline filter which simultaneously removes with high efficiency particles, water, oil degradation products and / or acid compounds from oils. The filter is used for applications in the industry, energy, mining, marine and offshore sector.

Typical applications e.g.:


- Hydraulic oils (*engine hydraulic / hydraulic control injection pump etc.*)
- Lubrication oils (*bearings, gear boxes, engines, compressors etc.*)
- HFD fluids / phosphate ester and other high inflammable fluids (*control systems etc.*)
- HFC fluids / water glycol and other aqueous fluids
- Machining oils
- Thermal oils / hot oils

ADVANTAGES

- simultaneous removal of particles, water and oil degradation products as well as neutralisation of acids
- constant high oil cleanliness
- no oil related, expensive machine failures
- longer lifetime of oil and components
- longer service life time of the expensive inline filters
- high filter efficiency by continuous fine and depth filtration, independent from the operation of the machine
- optimum filtration capacity by specifically adjusted pump flow

OFFLINE PRINCIPLE

The offline filtration enables due to the independent circuit an optimum adjustment of pump flow to operating fluid and a fine filtration to a range of 3 µm absolute respectively 1 µm nominal. The CJC™ Fine Filter unit draws the oil from the lowest point of the system tank. Slowly and at a constant flow rate the oil passes the CJC™ depth filter insert radially from the outside to the inside ensuring a long contact of the fluid with the filter media and thereby an enormously high filter efficiency. The oil is returned to the tank close to the suction point of the main system pump. Clean oil is able to loosen already deposited oil degradation products from the surfaces of the components or the tank and to hold them in suspension until finally the whole oil system is cleaned.

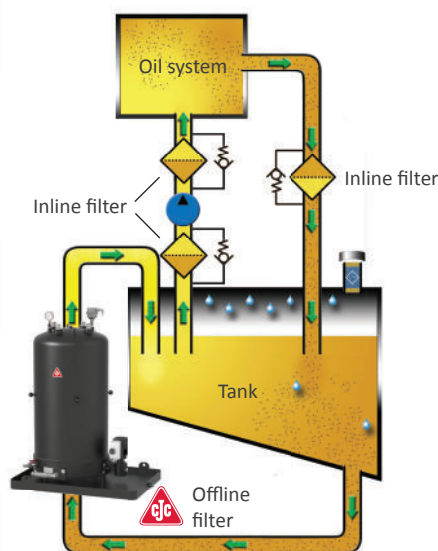

CJC™ Fine Filter unit 427/108

TECHNICAL DATA

CJC™ Fine Filter unit		427/108
Oil volume, max.	L	40,000
Oil temperature, max. *)	°C	130
Material filter dome / base		Steel
Pump flow	L/h	application-oriented, max. 6,000
Power consumption, approx.	kW	0.18 - 2.20
Motor voltage		AC / DC
Pressure drop, max.	bar	2
Dry weight, approx.	kg	422
Operating weight, approx.	kg	772
Filter inserts	pc.	16
Filter capacity - CJC™ Fine Filter inserts made of cellulose (see product sheets)		
Dirt holding capacity, approx.	kg	32
Water holding capacity **)	L	14.4 - 20.8
Filter capacity - CJC™ Filter insert type MS (see product sheets)		
Water holding capacity, approx.	L	24
Filter capacity - CJC™ Filter insert type AM, AO, BE (see product sheets)		
Neutralisation capacity (approx. values) with 1,000 L fluid **)		0.42 - 2.43
Equipment		
Standard:		
<ul style="list-style-type: none"> • Sampling point for oil analyses • Pressure switch for monitoring the degree of saturation of filter inserts • Automatic bleeding and venting valve for quick filter insert replacement • Motor protection switch with integrated ON / OFF switch • Non-return valve to avoid a return flow • Base plate as drip pan 		
Optional:		
<ul style="list-style-type: none"> • Leakage sensor • Electrical control • Preheater • Prefilter • Continuous air vent 		

*) Designs for other fluid conditions available on request.

**) Depends on filter insert type.



CJC™ Fine Filter unit 427/108

removes particles, water, oil degradation products and acids from oil

Product Sheet

COMPONENTS	
Item	Part
1	Filter dome
2	Filter base
8	Automatic bleeding and venting valve
9	Pressure gauge
11 / 12	Pump with motor
13	Non-return valve
14	Drain valve DN 25
15	Pressure switch
20	Base plate
24	Motor protection switch
25	Sampling point
A	Suction connection G 1/2" - G 1 1/4"
B	Filter outlet G 1/2" - G 1 1/4"

